

ANTENNA LABORATORY  
LIBRARY

# The Antenna Laboratory

Department of Electrical Engineering

A TECHNIQUE FOR MEASURING THE SCATTERING APERTURE  
AND ABSORPTION APERTURE OF AN ANTENNA

by

J. A. McEntee

Contract AF 30(635)-2811

ROME AIR DEVELOPMENT CENTER  
Griffiss Air Force Base, New York

612-15

1 January 1957

**DISTRIBUTION STATEMENT A**  
Approved for Public Release  
Distribution Unlimited



The Ohio State University  
Research Foundation  
Columbus, Ohio

20020521 022

DEFENSE TECHNICAL INFORMATION CENTER  
REQUEST FOR SCIENTIFIC AND TECHNICAL REPORTS

TITLE TECHNIQUE FOR MEASURING THE SCATTERING APERTURE AND ABSORPTION APERTURE OF AN ANTENNA

1. Report Availability (Please check one box)

- ☒ This report is available. (Complete section 2a - 2f)  
☐ This report is not available. (Complete section 3)

2a. Number of Copies  
Forwarded

2b. Forwarding Date

2c. Distribution Statement (Please check one box)

DoD Directive 5230.24, "Distribution Statements on Technical Documents," 18 Mar 87, contains seven distribution statements, as described briefly below. Technical documents MUST be assigned a distribution statement.

- ☒ DISTRIBUTION STATEMENT A: Approved for public release. Distribution is unlimited.
- ☐ DISTRIBUTION STATEMENT B: Distribution is authorized to U.S. Government Agencies only.
- ☐ DISTRIBUTION STATEMENT C: Distribution is authorized to U.S. Government Agencies and their contractors.
- ☐ DISTRIBUTION STATEMENT D: Distribution authorized to U.S. Department of Defense (DoD) and U.S. DoD contractors only.
- ☐ DISTRIBUTION STATEMENT E: Distribution authorized to U.S. Department of Defense (DoD) components only.
- ☐ DISTRIBUTION STATEMENT F: Further dissemination only as directed by the controlling DoD office indicated below or by higher authority.
- ☐ DISTRIBUTION STATEMENT X: Distribution authorized to U.S. Government agencies and private individuals or enterprises eligible to obtain export-controlled technical data in accordance with DoD Directive 5230.25, Withholding of Unclassified Data from Public Disclosure, 6 Nov 84.

2d. Reason For the Above Distribution Statement (in accordance with DoD Directive 5230.24)

2e. Controlling Office

2f. Date of Distribution Statement  
Determination

3. This report is NOT forwarded for the following reasons. (Please check appropriate box)

- ☐ It was previously forwarded to DTIC on \_\_\_\_\_ (date) and the AD number is \_\_\_\_\_
- ☐ It will be published at a later date. Enter approximate date if known. \_\_\_\_\_
- ☐ In accordance with the provisions of DoD Directives 3200.12, the requested document is not supplied because: \_\_\_\_\_

Print or Type Name

R.C. Hansen

Signature

*On phone conversation  
James J. Chirias 05/20/02*

Telephone

818 345-0770

(For DTIC Use Only)

AQ Number U02-08-1656

REPORT 612-15

REPORT  
by  
THE OHIO STATE UNIVERSITY RESEARCH FOUNDATION  
COLUMBUS 10, OHIO

Cooperator	Rome Air Development Center Griffiss Air Force Base, New York
Contract	AF 30(635)-2811
Investigation of	Landing System Problems
Subject of Report	A Technique for Measuring the Scattering Aperture and Absorption Aperture of an Antenna
Submitted by	J. A. McEntee Antenna Laboratory Department of Electrical Engineering
Date	1 January 1957

## ABSTRACT

A simple technique, employing echo-area measuring equipment, has been developed to measure the absolute values of the scattering aperture and absorption (effective) aperture of an antenna with a short-circuited feed.

The technique has been applied to an optimum pyramidal horn and the results are correlated with theoretical considerations found in the literature.

## TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
II. TECHNIQUE	1
III. MEASUREMENTS	4
IV. BIBLIOGRAPHY	9

# A TECHNIQUE FOR MEASURING THE SCATTERING APERTURE AND ABSORPTION APERTURE OF AN ANTENNA

by

J. A. McEntee

## I. INTRODUCTION

An investigation of the scattering characteristics of certain classes of antennas and reflectors as passive echo-enhancing devices for use in Ground-Controlled Approach (GCA) systems is being conducted.<sup>1</sup> As one result, a simple technique has been developed for measuring the absolute value of the absorption (effective) aperture and the scattering aperture of antennas using echo-area measuring equipment.

## II. TECHNIQUE

In general, the scattering characteristics of an antenna cannot be completely formulated in terms of a simple equivalent series circuit,<sup>2</sup> nor can they be determined completely from the radiation characteristics of the antenna. For example, if the antenna is terminated in an arbitrary impedance, the total back-scattered signal can be considered as the superposition of the signal scattered from the antenna structure, which is independent of the terminal conditions, and the signal due to reflection from this terminal impedance if it is not matched to the feed line. That is,

$$(1) \quad E_T = E_s + E_a e^{j\Phi}$$

where

$E_T$  = total scattered signal

$E_s$  = signal scattered from the structure

$E_a$  = scattered signal due to reflection from the termination

$\Phi$  = relative phase.

$E_s$ ,  $E_a$ , and  $\Phi$  are functions of the aspect angle ( $\theta$  and  $\phi$  in the conventional spherical coordinate system). In addition,  $E_a$  and  $\Phi$  are functions of the terminating impedance  $Z_T$ ; in particular, if  $Z_T = Z_o$ , then  $E_a = 0$ . Hence the total scattering pattern is a function of the terminal impedance.

If a moving short circuit can be placed in the feed line, then at any aspect a maximum and minimum total scattered signal can be obtained. That is,

$$(2) \quad |E_{\max}| = |E_1| + |E_2|$$

and

$$(3) \quad |E_{\min}| = |E_1| - |E_2|$$

where  $E_1$  and  $E_2$  represent the scattered and reradiated signals. From relationships (2) and (3) it follows that

$$(4) \quad \frac{E_2}{E_{\max}} = \frac{1}{2} \left( 1 + \frac{E_{\min}}{E_{\max}} \right)$$

and

$$(5) \quad \frac{E_2}{E_{\max}} = \frac{1}{2} \left( 1 - \frac{E_{\min}}{E_{\max}} \right)$$

These relations (4) and (5) are given in graphical form in Fig. 4, as a function of  $E_{\min}/E_{\max}$ .

The squares of (4) and (5) are relative echo areas which can be measured. That is,

$$(6) \quad \frac{\sigma_1}{\sigma_{\max}} = \left( \frac{E_1}{E_{\max}} \right)^2$$

and

$$(7) \quad \frac{\sigma_2}{\sigma_{\max}} = \left( \frac{E_2}{E_{\max}} \right)^2$$

One is the equivalent echo area ( $\sigma_s$ ) of the scattered signal which we will define as being related to the scattering aperture ( $A_s$ ). That is,

$$(8) \quad \sigma_s = \frac{4\pi A_s^2}{\lambda^2}$$

if in turn a scattering gain is defined as

$$(9) \quad g_s = \frac{4\pi A_s}{\lambda^2}$$

The other is the equivalent echo area ( $\sigma_e$ ) of the reradiated signal which is similarly related to the effective aperture.

$$(10) \quad \sigma_e = \frac{4\pi A_e^2}{\lambda^2} .$$

The identification or sorting out of the echo areas can be resolved by replacing the short circuit with a matched load. The echo response now consists only of the signal scattered from the structure since the signal which would be reradiated is completely absorbed in the load.

The absolute value of the maximum response ( $\sigma_{max}$ ) can be determined precisely by using a standard target of known echo area. We will define relative echo area ( $\sigma$ ) in decibels as equal to  $10 \log_{10} (\sigma_a / \sigma_b)$ .

From the above definitions, then,

$$(11) \quad A_e = \left( \frac{\lambda^2 \sigma_e}{4\pi} \right)^{\frac{1}{2}}$$

and

$$(12) \quad A_s = \left( \frac{\lambda^2 \sigma_s}{4\pi} \right)^{\frac{1}{2}} .$$

The gain of the antenna can be determined as a by-product of this technique from the relation

$$(13) \quad \text{gain} = \frac{4\pi A_e}{\lambda^2} .$$

Note that on the basis of the above definition the scattering aperture and the absorption aperture are not necessarily equal, as predicted by the simple equivalent series circuit representation, when the feed line and termination are matched to the antenna. This is true because it is too restrictive in that all of the current flows through the equivalent antenna impedance (which represents scattered power) and the load impedance (which represents absorbed power), and this is not the usual situation in practice.



### III. MEASUREMENTS

This technique was applied to an optimum pyramidal horn. The measurements were taken in an indoor anechoic chamber using a cw reflection measuring system.<sup>3</sup>

The diagram below, Fig. 1, indicates the significant dimensions of the horn antenna.

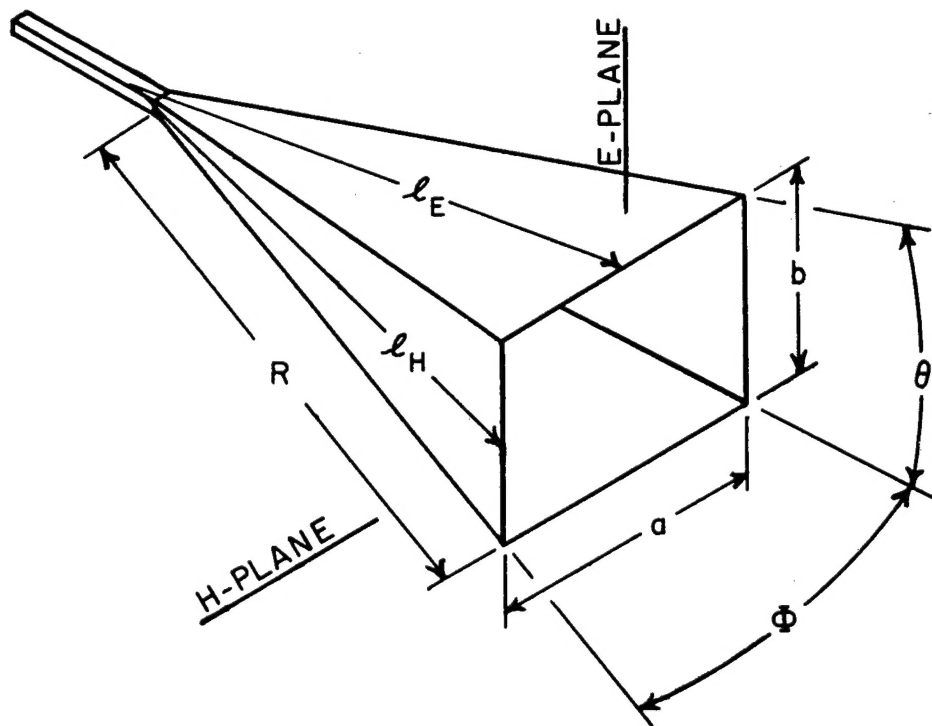


Fig. 1. Horn dimensions.

The results are shown below:

#### HORN DIMENSIONS:

$$l_E - 7.45'' = 5.73\lambda$$

$$l_H - 8.18'' = 6.30\lambda$$

$$\theta - 37\frac{1}{2}^\circ$$

$$\phi - 42^\circ$$

$$a - 5.88'' = 4.52\lambda$$

$$b - 4.77'' = 3.67\lambda$$

$$R - 7.27'' = 5.59\lambda$$

$$\lambda - 3.30 \text{ cm}$$

#### RESULTS:

$$A_p = ab = 1.81 \times 10^{-2} \text{ meters}^2$$

$$\sigma_e = 0.77 \text{ meters}^2$$

$$\sigma_s = 0.57 \text{ meters}^2$$

$$A_e = 0.82 \times 10^{-2} \text{ meters}^2$$

$$A_s = 0.71 \times 10^{-2} \text{ meters}^2$$

$$G = 94.7 \text{ or } 19.8 \text{ db } (\pm 0.1 \text{ db})$$

$$A_e/A_p = 45.3\%$$

$$A_s/A_p = 39\%$$

$$A_e/A_s = 1.16$$

The gain (directivity) of an optimum pyramidal horn with the above physical dimensions can be calculated using theoretical considerations found in the literature.<sup>4, 5</sup> From this value of gain, the effective aperture can be calculated from (13). Using the theoretical considerations the calculated gain was 19.76 db.

Figure 2 shows the echo-area patterns of the horn under test as a function of azimuth. Figure 3 is the radiation pattern of the horn in the H-plane which is identical to the echo pattern due to the reradiated signal.

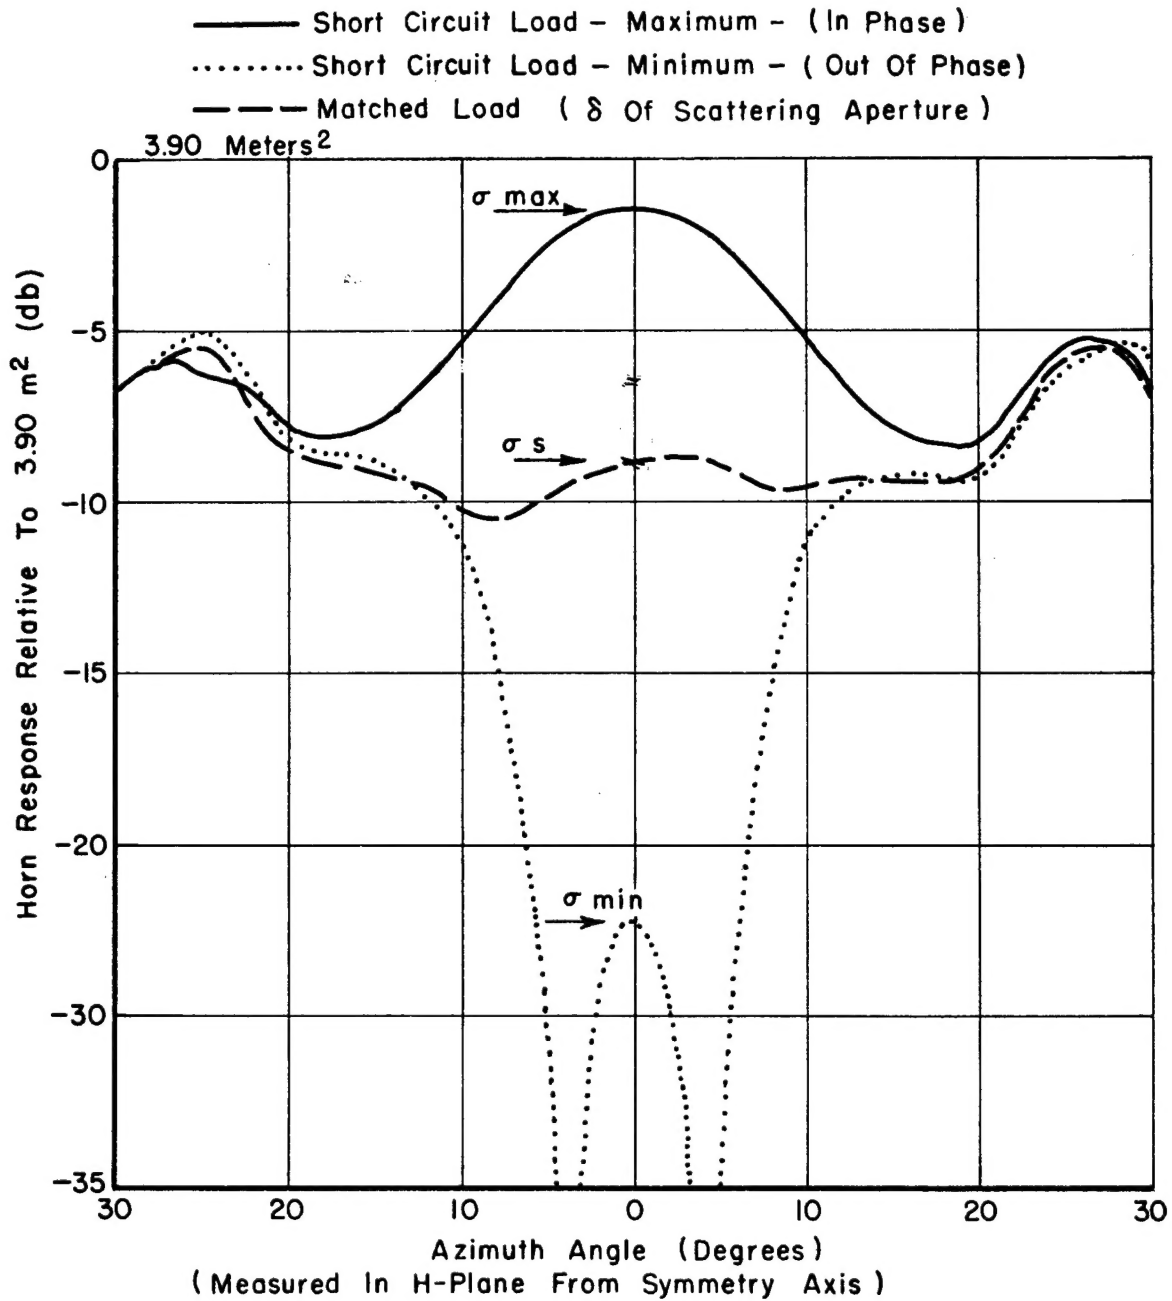


Fig. 2. H-plane echo-area patterns of a pyramidal horn with various loads. Frequency = 9080 mc.

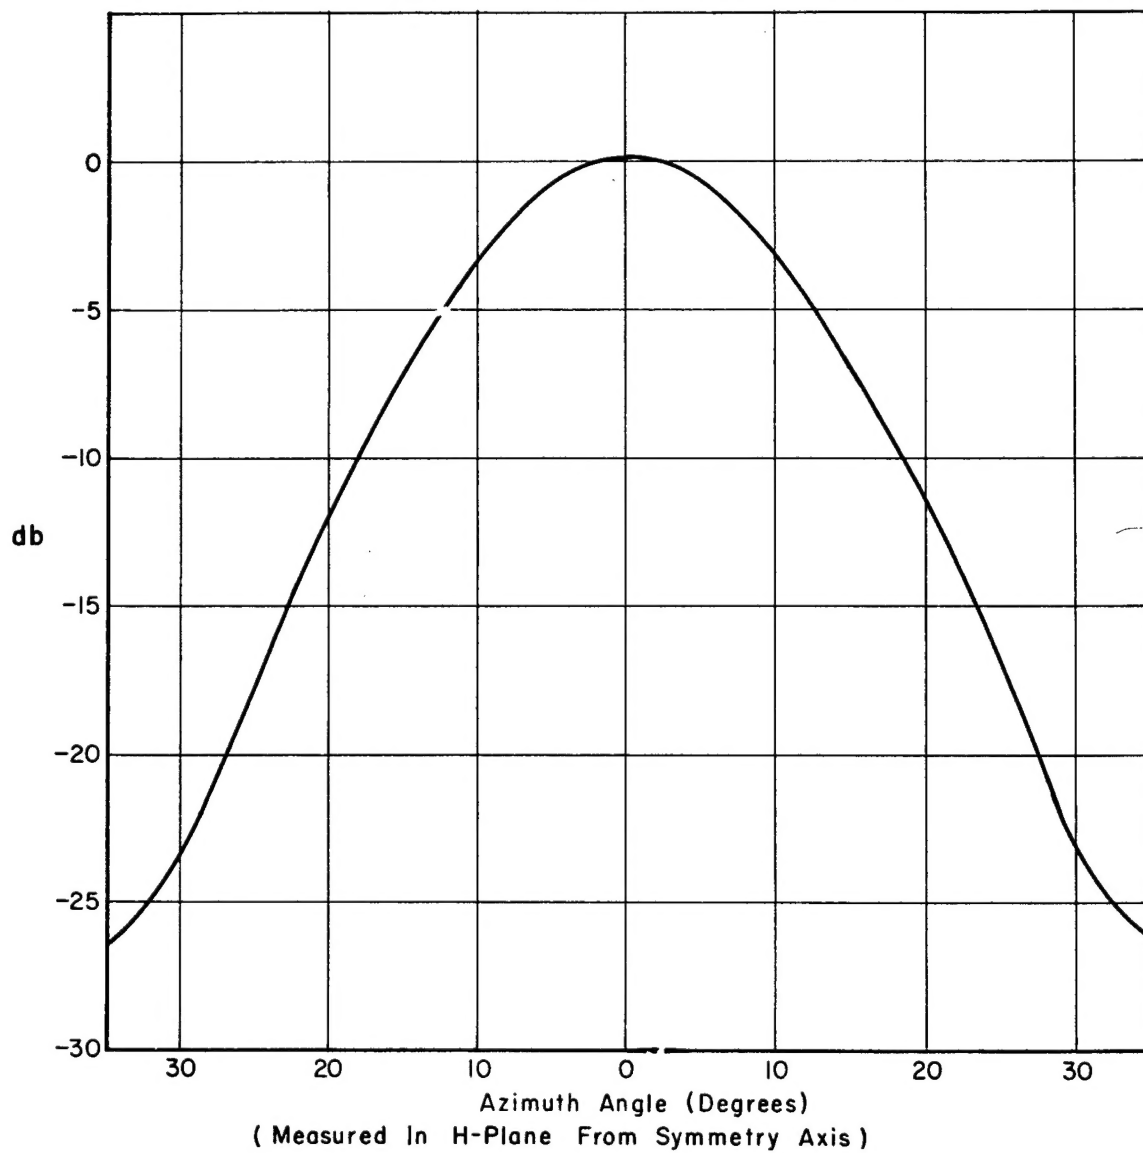


Fig. 3. Radiation pattern of optimum pyramidal horn in H-plane. Frequency = 9080 mc.

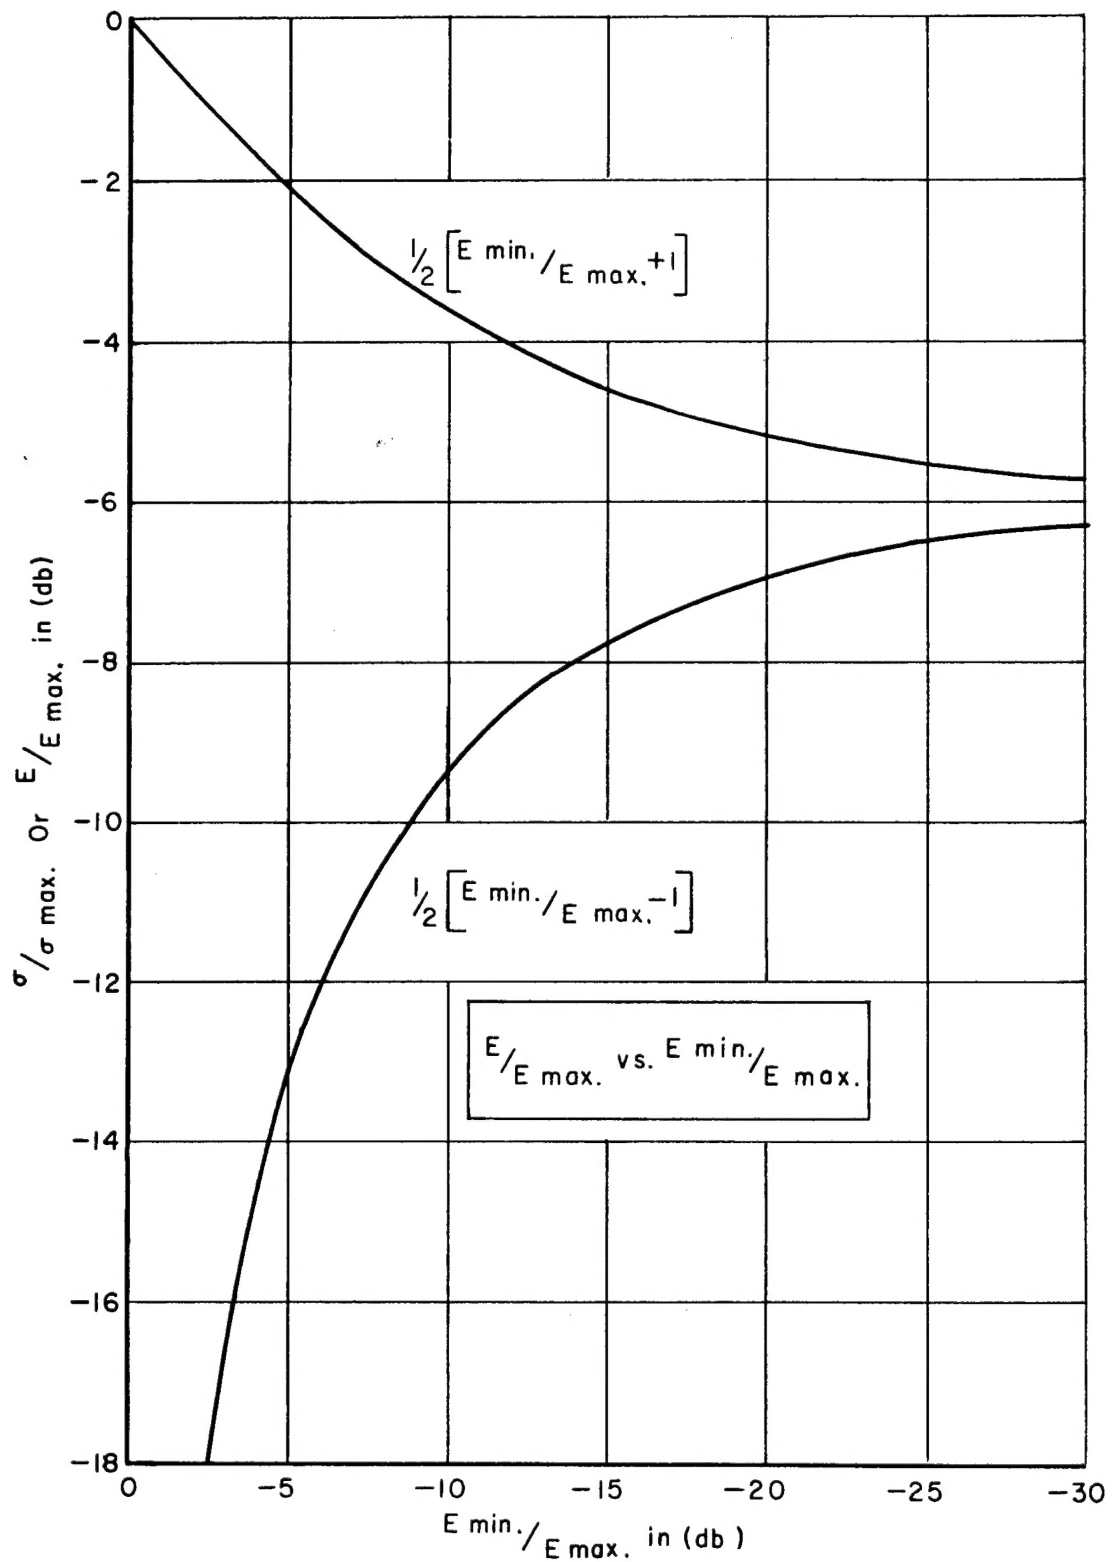


Fig. 4. Echo area relative to  $\sigma_{\max}$  as function of  $E_{\max}/E_{\min}$ .

#### IV. BIBLIOGRAPHY

- <sup>1</sup> Annual Engineering Report Vol. II, 612-12, 1 October 1956, Antenna Laboratory, The Ohio State University Research Foundation; prepared under Contract AF 30(635)-2811, Rome Air Development Center, Griffiss Air Force Base, New York.
- <sup>2</sup> King, D. D., "The Measurement and Interpretation of Antenna Scattering," Proc. I.R.E., vol. 37, July 1949. pp. 770-777.
- <sup>3</sup> Upson, J., and Hines, J. N., "Indoor Echo-Area Measuring System," Report 612-11, 1 November 1956, Antenna Laboratory, The Ohio State University Research Foundation; prepared under Contract AF 30(635)-2811, Rome Air Development Center, Griffiss Air Force Base, New York.
- <sup>4</sup> Schelkunoff, S. A., Electromagnetic Waves, D. Van Nostrand Co. Inc., 1943. pp. 360-365.
- <sup>5</sup> Braun, E. H., "Some Data for the Design of Electromagnetic Horns," Trans. I.R.E., vol. AP-4. pp. 29-31. January 1956.